


S-Corner PVC 90° I / A Prefabricated PVC corners

Product Description	S-Corner PVC 90° I / A are made of premium-quality PVC by injection moulding procedure.
Uses	S-Corner PVC 90° I / A are used as prefabricated corners on Sarnafil® G/S flat roof systems.
Characteristics / Advantages	<ul style="list-style-type: none">■ Outstanding resistance to weathering, including UV irradiation■ Ease of application■ Excellent weldability■ Recyclable
Tests	
Approvals / Standards	Quality management system EN ISO 9001/14001
Appearance	Surface: smooth
Colour	Light grey (nearest RAL 7047) Other colours on request
Packaging	Bag with 10 pieces
Storage Conditions	S-Corner PVC 90° I / A shall be stored in dry conditions.
Shelf-Life	S-Corner PVC 90° I / A does not expire during correct storage.



S-Corner PVC 90° A

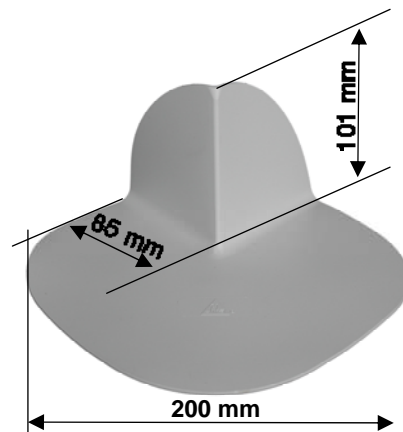

Art. No.	Description	Colour	Uses	Material thickness
183648	S-Corner PVC 90° I	Light grey	Internal corner	1.5 mm
183646	S-Corner PVC 90° A	Light grey	External corner	1.5 mm

Technical Data

Material Basis Polyvinyl chloride (PVC)

System Information

System Structure Compatible products: Sarnafil® PVC flat roof waterproofing membranes

Temperature The use of S-Corner PVC 90° I / A is limited to geographical locations with average monthly minimum temperatures of -50 °C. Permanent ambient temperature during use is limited to +50 °C.

Installation Instructions

Installation Method According to the valid installation instructions for Sarnafil® and Sikaplan® flat roofing membranes.

Notes on Installation / Limits

Installation works to be carried out only by Sika instructed contractors for roofing. Temperature limits for the installation of the S-Corner PVC 90° I / A:
 Substrate temperature: -30 °C min. / +60 °C max.
 Ambient temperature: -20 °C min. / +60 °C max.
 Installation of some ancillary products, e.g. contact adhesives / cleaners is limited to temperatures above +5 °C. Please observe information given by Product Data Sheets.
 Special measures may be compulsory for installation below +5 °C ambient temperature due to safety requirements in accordance with national regulations.

Legal Notes

The information, and, in particular, the recommendations relating to the application and end-use of Sika's products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject of our terms and conditions of sale. Users should always refer to the most recent issue of the Australian version of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

PLEASE CONSULT OUR TECHNICAL DEPARTMENT FOR FURTHER INFORMATION.



Sika Australia Pty Limited
 www.sika.com.au

ABN: 12 001 342 329
 Tel: 1300 22 33 48

